
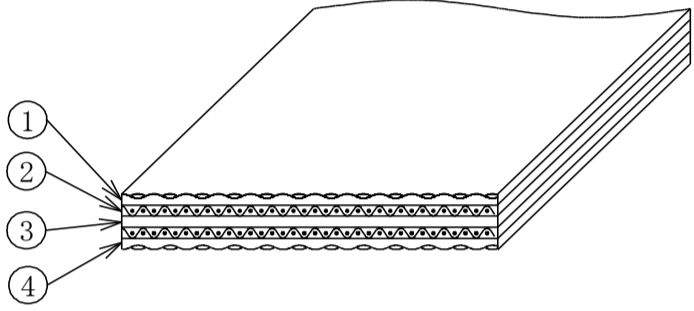


Technical Data Sheet		NITTA BELT POLY		
P-058		Belt type	XH-1000-4	
Applications		Belt for Folder Gluer Machines		
Item	Description		Remarks	
Specification	Construction			①Soft NBR (Textured Pattern, Blue) ②PA Fabric ③PA Film ④Soft NBR (Textured Pattern, Blue)
Dimensions	Antistatic	Yes		
	Width	20 to 320 [mm]		
	Length	500 to 103,000 [mm]		
	Thickness	4.0 [mm]		
	Joint	Skived joint Adhesive Polybond A and E		
Properties	Tensile strength	300 [N/mm]		Test speed: 50mm/min
	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 [%]		
	Tension at 1 [%]	7.5 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	75 [mm]		
	Operating temp.	-20 to +80°C		
	Coefficient of friction	0.8 to 0.9(Paper) / 0.7 to 0.8(Steel) (Both side)		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	4.4 [kg/m ²]		
Features				

NITTA CORPORATION

Industrial Products Div.

The contents of this TDS may be changed without notice.